


HYD-258R-15W 4K Ra90

Downlight

DESCRIPTION

HYD-258R recessed downlight is crafted using an integrated die-casting aluminum process, featuring a solid and stable structure with excellent corrosion resistance. Aluminum itself has high thermal conductivity, and when combined with the downlight's heat dissipation structure, it can achieve efficient heat dissipation, reduce LED light attenuation, and extend the lifespan of the light source. This downlight uses a high-transparency glass lens that is resistant to high temperatures and aging, ensuring uniform light distribution.



ELECTRICAL FEATURES

Power	15 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Lens-Transparent (PC)
Body Color	Silver
Adjustability	Not Adjustable
IP Class	IP65
Installation way	Recessed
Dimension	D100 x H64
Cut Dimension	90 mm

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-10 °C ~ + 45 °C


PACKAGE SIZE

PCS/CTN	-
Carton Size	-

PRODUCT SPECIFICATION

Luminaire luminous flux	1140 lm
Efficiency	76 lm/w
CCT	4000 k
CRI	≥90
Beam Angle	45°
Life span	30,000 h
Light source	LM80 Tube -

IES FEATURES

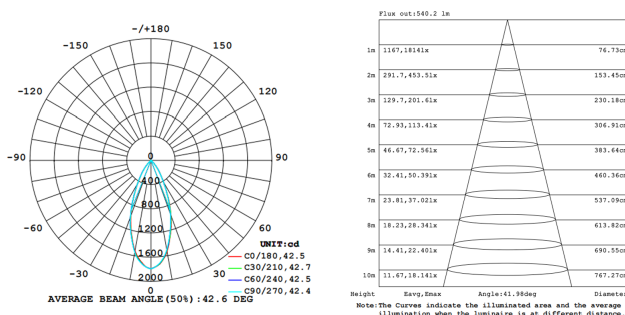

APPLICATIONS

Offices, Schools, Supermarkets, factory, Warehouses, Villas, Houses, Hotel, Office

