


HYD-116C-10W-6500K

Panel light

DESCRIPTION

The HYD-116C recessed panel light features an aluminum body that offers excellent heat dissipation, effectively reducing light depreciation and extending the lifespan of the fixture. This light is equipped with carefully selected LED chips and a highly transparent diffuser, which not only ensures high efficiency and energy savings but also minimizes dark spots in the light distribution. The light is soft and non-glaring, meeting customers' demands for a comfortable and healthy visual environment. Additionally, the HYD-116C recessed panel light adopts an embedded design, seamlessly integrating with various interior styles without being obtrusive and enhancing the aesthetic appeal of the space.

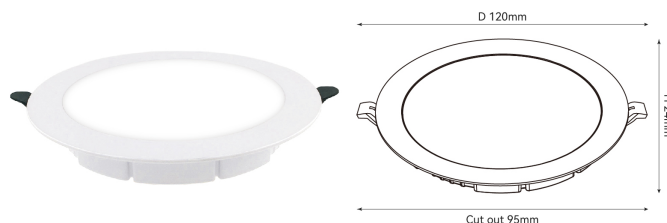

ELECTRICAL FEATURES

Power	10 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Diffuser-White (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Mech.impact protection code	IK20
Installation way	Recessed
Dimension	D120 x H24
Cut Dimension	95 mm

APPROVAL AND APPLICATION

Standard	CB,CE
Working temperature	-10 °C ~ + 45 °C


PACKAGE SIZE

PCS/CTN	50
Carton Size	L64.5 x W27 x H29.5

PRODUCT SPECIFICATION

Luminaire luminous flux	950 lm
Efficiency	95 lm/w
CCT	6500 k
CRI	≥80
Beam Angle	110°
Life span	50,000 h
Light source	HYUNDAI

IES FEATURES

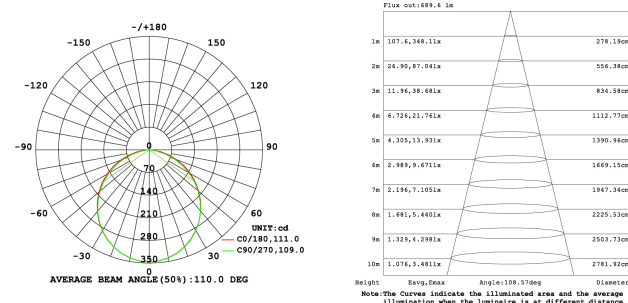

APPLICATIONS

Showrooms, Commercial applications, Hotel, Dining room, Office, Home

