

HYD-W09B-10WX2 IP65

Wall light

DESCRIPTION

Wall lamps provide focused illumination, enabling precise local lighting. They can also function as supplementary light sources to the primary lighting, effectively minimizing dark zones and creating a uniform, soft, and glare-free lighting environment. Furthermore, their gentle light output makes them suitable for use as night lights or pathway indicators. Wall lamps exemplify the advantage of Versatility, serving not only as practical lighting fixtures but also as aesthetic decorative elements. They enhance spatial ambience while fulfilling functional needs, thereby improving both living quality and perceived safety.

ELECTRICAL FEATURES

Power	20 W
Input Voltage	AC110 - 265V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES


Materials	Aluminum
Surface Material	Lampshade-Transparent color (Glass)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP65
Installation way	Wall mounted
Dimension	W90 x L122 x H260
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS,SAA
Working temperature	-10 °C ~ + 45 °C

PACKAGE SIZE


PCS/CTN	-
Carton Size	-



PRODUCT SPECIFICATION

Luminaire luminous flux	1720 lm
Efficiency	86 lm/w
CCT	3000 k
CRI	≥80
Beam Angle	24°
Life span	30,000 h
Light source	LM80 Tube -

IES FEATURES

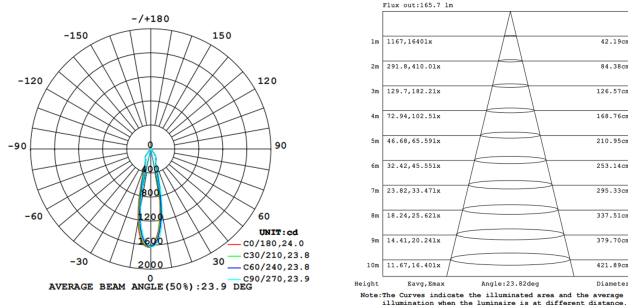

APPLICATIONS

porchs, Villas, Stairs, Hotel, Bedroom, Porch, Dining room, Outdoor porch, Courtyard wall

