
# HYD-716-100W 5000K

High Bay

## DESCRIPTION

716 is an economical and compact design high bay light, with the optimized heat sink structure,the 4 power 100W/150W/200W/240W and 4 size compact design saves cost and freight, power selectable easy for stock and quick delivery, 160lm/W or 200lm/W different efficiency for optional to meet different budget.

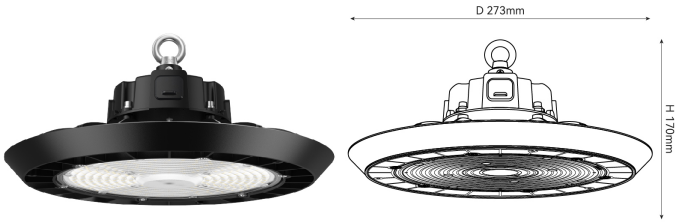


## ELECTRICAL FEATURES

| | |
|---|---|
| Power | 100 W |
| Input Voltage | AC120 - 277V |
| Line Frequency | 50 Hz |
| Powered By | HYUNDAI |
| Dimmable | No |
| Control interface | No |


## PRODUCT SPECIFICATION


| | |
|---|---|
| Luminiaire luminous flux | 16300 lm |
| Efficiency | 163 lm/w |
| CCT | 5000 k |
| CRI | ⩾80 |
| Beam Angle | 90° |
| Life span | 50,000 h |
| Light source | LM80 Module - SMD |

## TECHNICAL FEATURES

| | |
|---|---|
| Materials | Aluminum |
| Surface Material | Lens-transparent (PC) |
| Body Color | BLACK |
| Adjustability | Not Adjustable |
| IP Class | IP65 |
| Installation way | Suspendant |
| Dimension | D273 x H170 |
| Cut Dimension | N/A |

## IES FEATURES




## APPROVAL AND APPLICATION

| | |
|---|---|
| Standard | CB,CE,ROHS |
| Working temperature | -30 °C ~ + 50 °C |

## PACKAGE SIZE

| | |
|---|---|
| PCS/CTN | - |
| Carton Size | - |

## APPLICATIONS

factory, Warehouses, outdoor, Parking lots, loading areas, Storage areas, Industrial areas

