

HYD-716-100W 5000K

High Bay

DESCRIPTION

716 is an economical and compact design high bay light, with the optimized heat sink structure, the 4 power 100W/150W/200W/240W and 4 size compact design saves cost and freight, power selectable easy for stock and quick delivery, 160lm/W or 200lm/W different efficiency for optional to meet different budget.



ELECTRICAL FEATURES

Power	100 W
Line Frequency	50 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Lens-transparent (PC)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP65
Installation way	Suspendant
Dimension	D273 x H170
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-30 °C ~ + 50 °C


PACKAGE SIZE

PCS/CTN	-
Carton Size	-

PRODUCT SPECIFICATION

Luminaire luminous flux	16300 lm
Efficiency	163 lm/w
CCT	5000 k
CRI	≥80
Beam Angle	90°
Life span	50,000 h
Light source	LM80 Module - SMD

IES FEATURES

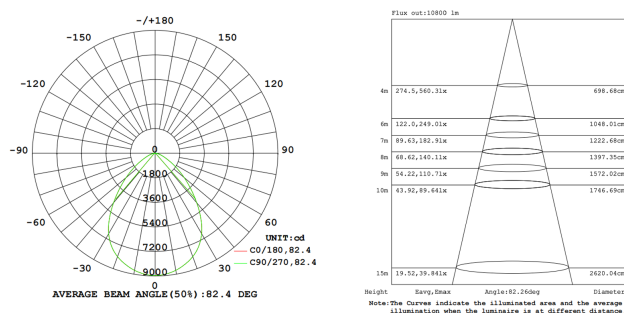

APPLICATIONS

factory, Warehouses, outdoor, Parking lots, loading areas, Storage areas, Industrial areas

