
HYD-715-100W 6500K

High Bay

DESCRIPTION

This fixture features a hollow heat sink design for maximum airflow and heat dissipation. Powered by a high-lumen LED (50,000-hour lifespan) and a 95% efficient optical lens, it delivers brilliant illumination. The durable aluminum-magnesium alloy construction and diamond reflection process ensure superior brightness and corrosion resistance. An integrated CCT switch allows for easy adjustment of the light color.

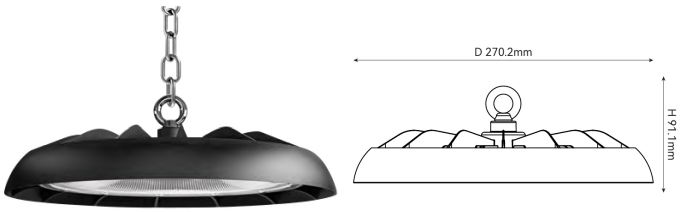

ELECTRICAL FEATURES

Power	100 W
Input Voltage	AC160 - 265V
Line Frequency	50/60 Hz
Power Factor (Fraction)	0.9
Powered By	HYUNDAI
Dimmable	No
Control interface	No


PRODUCT SPECIFICATION


Luminiaire luminous flux	11900 lm
Efficiency	119 lm/w
CCT	6500 k
CRI	⩾80
Beam Angle	90°
Life span	30,000 h
Light source	LM80 Module - SMD

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Lens-semi transparent (PC)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP65
Mech.impact protection code	IK06
Installation way	Suspendant
Dimension	D270.2 x H91.1
Cut Dimension	N/A

IES FEATURES





APPROVAL AND APPLICATION

Standard	CE
Working temperature	-10 °C ~ + 50 °C

PACKAGE SIZE

PCS/CTN	-
Carton Size	-

APPLICATIONS

factory, Warehouses, outdoor, loading areas, Storage areas, Industrial areas

