
# HYD-715-200W 4000K

High Bay

## DESCRIPTION

This fixture features a hollow heat sink design for maximum airflow and heat dissipation. Powered by a high-lumen LED (50,000-hour lifespan) and a 95% efficient optical lens, it delivers brilliant illumination. The durable aluminum-magnesium alloy construction and diamond reflection process ensure superior brightness and corrosion resistance. An integrated CCT switch allows for easy adjustment of the light color.

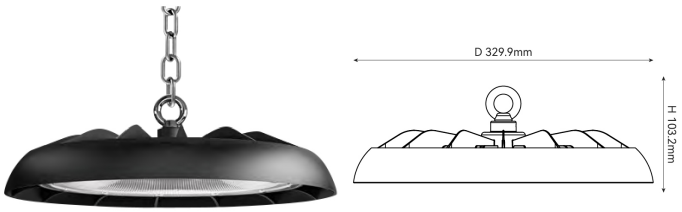


## ELECTRICAL FEATURES

| | |
|---|---|
| Power | 200 W |
| Input Voltage | AC160 - 265V |
| Line Frequency | 50/60 Hz |
| Power Factor (Fraction) | 0.9 |
| Powered By | HYUNDAI |
| Dimmable | No |
| Control interface | No |


## PRODUCT SPECIFICATION


| | |
|---|---|
| Luminiaire luminous flux | 24600 lm |
| Efficiency | 123 lm/w |
| CCT | 4000 k |
| CRI | ⩾80 |
| Beam Angle | 90° |
| Life span | 30,000 h |
| Light source | LM80 Module - SMD |

## TECHNICAL FEATURES

| | |
|---|---|
| Materials | Aluminum |
| Surface Material | Lens-semi transparent (PC) |
| Body Color | BLACK |
| Adjustability | Not Adjustable |
| IP Class | IP65 |
| Mech.impact protection code | IK06 |
| Installation way | Suspendant |
| Dimension | D329.9 x H103.2 |
| Cut Dimension | N/A |

## IES FEATURES








## APPROVAL AND APPLICATION

| | |
|---|---|
| Standard | CE |
| Working temperature | -10 °C ~ + 50 °C |

## APPLICATIONS

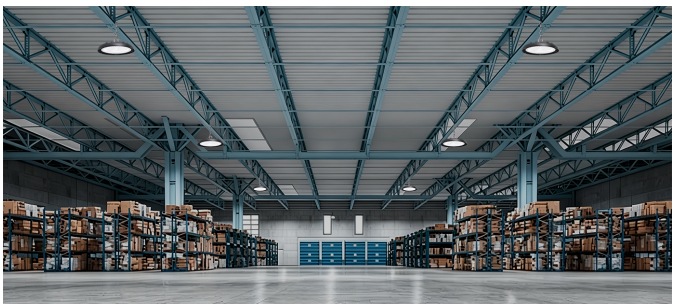factory, Warehouses, outdoor, loading areas, Storage areas, Industrial areas



## PACKAGE SIZE

| | |
|---|---|
| PCS/CTN | - |
| Carton Size | - |