


HYD-W06B-5WX2 3K

Wall light

DESCRIPTION

Wall lamps provide focused illumination, enabling precise local lighting. They can also function as supplementary light sources to the primary lighting, effectively minimizing dark zones and creating a uniform, soft, and glare-free lighting environment. Furthermore, their gentle light output makes them suitable for use as night lights or pathway indicators. Wall lamps exemplify the advantage of Versatility, serving not only as practical lighting fixtures but also as aesthetic decorative elements. They enhance spatial ambiance while fulfilling functional needs, thereby improving both living quality and perceived safety.



ELECTRICAL FEATURES

Power	10 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	Die-cast aluminum
Surface Material	Lampshade-transparent (Glass)
Body Color	Grey Housing
Adjustability	Not Adjustable
IP Class	IP54
Installation way	Wall mounted
Dimension	W68 x L92 x H151
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CCC,CB,CE,ROHS,SAA
Working temperature	-10 °C ~ + 45 °C


PACKAGE SIZE

PCS/CTN	20
Carton Size	L52 x W35 x H20

PRODUCT SPECIFICATION

Luminaire luminous flux	1020 lm
Efficiency	102 lm/w
CCT	3000 k
CRI	≥80
Beam Angle	23°
Life span	30,000 h
Light source	HYUNDAI

IES FEATURES

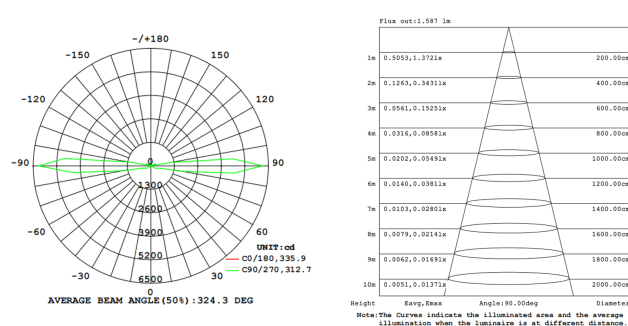

APPLICATIONS

porchs, Villas, Stairs, Hotel, Bedroom, Porch, Dining room, Outdoor porch, Courtyard wall

