
HYD-163R-40W 4000K

Ceiling Light

DESCRIPTION

The HYD−163R ceiling lamp is made of high−quality PMMA material, providing soft and even light with a light transmittance of over 92%, making every inch of space bright and transparent and effectively reducing dark areas. Compared with traditional glass, PMMA material is lightweight, flexible, and stable in installation, fundamentally eliminating the safety hazard of glass breakage and providing strong protection for the safety of family members. This material does not yellow easily, can maintain a brand−new state for a long time, and has excellent UV resistance, ensuring that the lamp body remains clear and bright after long−term use, avoiding the problem of ordinary plastic lampshades aging and yellowing, and always looking as good as new. Its surface is smooth and fine, and does not accumulate dust easily.

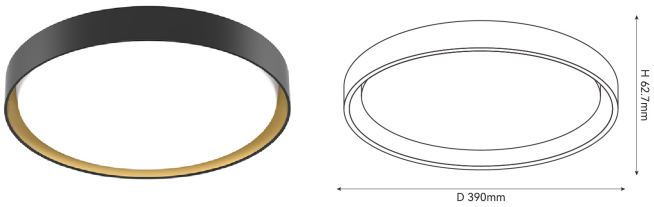

ELECTRICAL FEATURES

Power	40 W
Powered By	HYUNDAI
Dimmable	No
Control interface	No

PRODUCT SPECIFICATION

Luminiaire luminous flux	4800 lm
Efficiency	120 lm/w
CCT	4000 k
CRI	⩾80
Beam Angle	120°
Life span	30,000 h
Light source	LM80 Module - SMD

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Lampshade-White (PMMA)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Surface
Dimension	D390 x H62.7
Cut Dimension	N/A

APPLICATIONS

Hospitals & Clinics, Hotel, Bedroom, Dining room, Living room, Office, Meeting room



APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 45 °C

PACKAGE SIZE

PCS/CTN	-
Carton Size	-