
HYD-162S-40W 4000K

Ceiling Light

DESCRIPTION

The HYD-162S ceiling light is constructed from high-quality aluminum alloy and has undergone a precise oxidation treatment process, ensuring a robust structure and excellent load-bearing capacity. The fixture maintains dimensional stability and resists deformation even under prolonged use. The lampshade is fabricated from imported-grade polycarbonate (PC) material, offering a light transmittance exceeding 90%. This results in soft and uniform illumination, effectively minimizing glare and providing enhanced visual comfort for household occupants. Furthermore, the lampshade surface features a specialized coating that provides dust-resistant and anti-yellowing properties, preserving its aesthetic appearance and ensuring long-term brightness and luster.

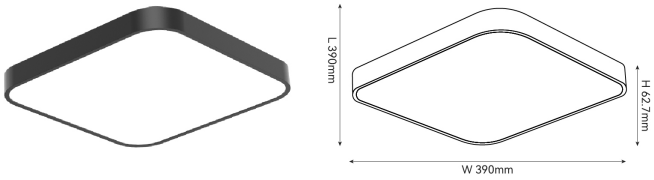

ELECTRICAL FEATURES

Power	40 W
Powered By	HYUNDAI
Dimmable	No
Control interface	No

PRODUCT SPECIFICATION

Luminiaire luminous flux	4800 lm
Efficiency	120 lm/w
CCT	4000 k
CRI	⩾80
Beam Angle	120°
Life span	30,000 h
Light source	LM80 Module - SMD

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Lampshade-White (PC)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Surface
Dimension	W390 x L390 x H62.7
Cut Dimension	N/A

APPLICATIONS

Hospitals & Clinics, Hotel, Bedroom, Dining room, Living room, Office, Meeting room



APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 45 °C

PACKAGE SIZE

PCS/CTN	-
Carton Size	-