


HYD-298-7W WH 3CCT

Downlight

DESCRIPTION

The HYD-298 surface-mounted downlight features a lightweight PA lamp body and a PC lens, delivering a uniform and soft light output. Available in pure white and black, it can blend seamlessly into modern, minimalist and industrial spaces. It can be installed directly without a ceiling, making it an ideal choice for lighting in hotels, homes and supermarkets.



ELECTRICAL FEATURES

Power	7 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Power Factor (Fraction)	0.5
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	PA
Surface Material	Lens-Transparent (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Mech.impact protection code	IK06
Installation way	Surface
Dimension	D90 x H100
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	-
Working temperature	-20 °C ~ + 40 °C


PACKAGE SIZE

PCS/CTN	50
Carton Size	L50 x W50 x H25

PRODUCT SPECIFICATION

Luminaire luminous flux	609 lm
Efficiency	87 lm/w
CCT	Switchable (3000, 4200, 6500)
CRI	≥80
Beam Angle	55°
Life span	20,000 h
Light source	LM80 Module - COB

IES FEATURES

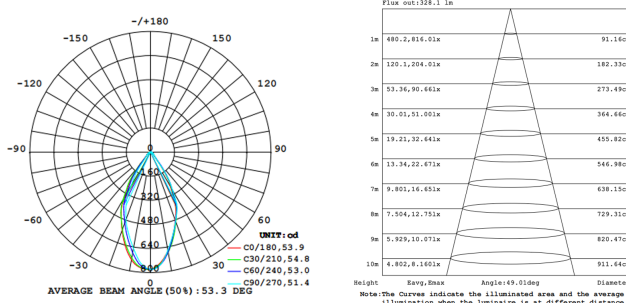

APPLICATIONS

Offices, Schools, Supermarkets, Restaurants, Fashion Stores, Shopping malls, Villas, Hotel, Home

