HYD-158R-18W 4K

Panel light

DESCRIPTION

The surface-mounted panel light adopts high-quality LED chips, achieving higher luminous efficacy. It is also equipped with a well-known brand driver to ensure a product lifespan of over 20,000 hours. This luminaire is specifically designed for architectural spaces without suspended ceilings or pre-buried conduits, and can perfectly adapt to various venues.
The HYD – 158R surface-mounted panel light, with its outstanding comprehensive performance, is dedicated to creating a bright, comfortable, healthy, and productivity-enhancing lighting environment for users. It is the ideal lighting choice for modern spaces that pursue quality and efficiency.

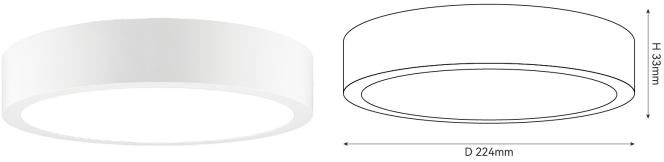

ELECTRICAL FEATURES

Power	18 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

PRODUCT SPECIFICATION

Luminiaire luminous flux	2016 lm
Efficiency	112 lm/w
CCT	4000 k
CRI	⩾80
Beam Angle	115°
Life span	20,000 h
Light source	HYUNDAI

TECHNICAL FEATURES

Materials	PC
Surface Material	Diffuser-White (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Surface
Dimension	D224 x H33
Cut Dimension	N/A

IES FEATURES





APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 40 °C

PACKAGE SIZE

PCS/CTN	20
Carton Size	L48 x W44.5 x H26

APPLICATIONS

Healthcare, Offices, Schools, Supermarkets, Hospitals & Clinics, Restaurants, Villas, Office, Home