


HYD-158S-12W 3K

Panel light

DESCRIPTION

The surface-mounted panel light adopts high-quality LED chips, achieving higher luminous efficacy. It is also equipped with a well-known brand driver to ensure a product lifespan of over 20,000 hours. This luminaire is specifically designed for architectural spaces without suspended ceilings or pre-buried conduits, and can perfectly adapt to various venues. The HYD - 158S surface-mounted panel light, with its outstanding comprehensive performance, is dedicated to creating a bright, comfortable, healthy, and productivity-enhancing lighting environment for users. It is the ideal lighting choice for modern spaces that pursue quality and efficiency.

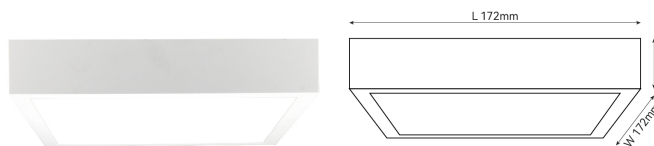

ELECTRICAL FEATURES

Power	12 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	PC
Surface Material	Diffuser-White (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Surface
Dimension	W172 x L172 x H31
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 40 °C


PACKAGE SIZE

PCS/CTN	40
Carton Size	L44.5 x W37 x H39.5

PRODUCT SPECIFICATION

Luminaire luminous flux	1236 lm
Efficiency	103 lm/w
CCT	3000 k
CRI	≥80
Beam Angle	115°
Life span	20,000 h
Light source	HYUNDAI

IES FEATURES

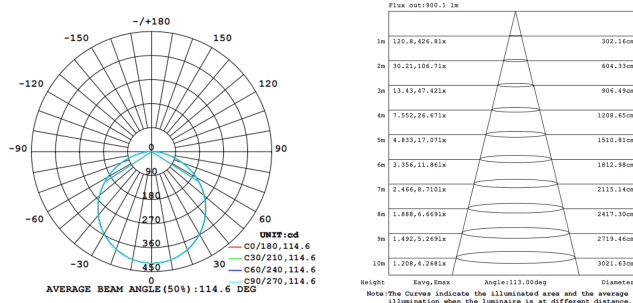

APPLICATIONS

Healthcare, Offices, Schools, Supermarkets, Hospitals & Clinics, Villas, Hotel, Dining room, Home

