


HYD-20007-7W 3CCT

Downlight

DESCRIPTION

The embedded downlight adopts PA material for the lamp body, which has excellent electrical insulation performance. The outer shell is non-conductive, effectively reducing the risk of leakage. PA material also has outstanding anti-corrosion and salt spray resistance, is less prone to oxidation and rust, and has a longer service life. Its uniform heat conduction can prevent local overheating, further extending the lifespan of the LED beads. In addition, PA material is lighter in weight, significantly reducing the load on the ceiling, making it particularly suitable for light steel keel ceilings or renovation of old houses, providing more convenience for construction.



ELECTRICAL FEATURES

Power	7 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Power Factor (Fraction)	0.5
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	PA,PC
Surface Material	Lens-Transparent (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Recessed
Dimension	W90 x L90 x H86
Cut Dimension	70 mm

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 40 °C


PACKAGE SIZE

PCS/CTN	50
Carton Size	L59 x W51 x H23

PRODUCT SPECIFICATION

Luminaire luminous flux	693 lm
Efficiency	99 lm/w
CCT	Switchable (3000, 4200, 6500)
CRI	≥80
Beam Angle	55°
Life span	20,000 h
Light source	HYUNDAI

IES FEATURES

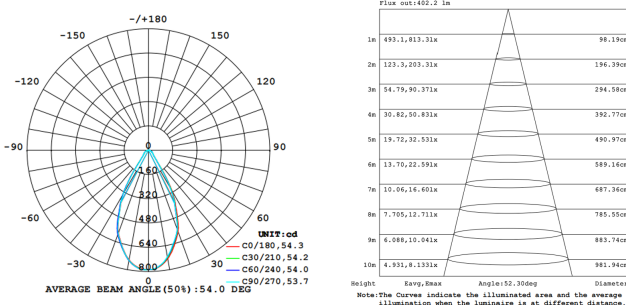

APPLICATIONS

Healthcare, Offices, Schools, Supermarkets, Restaurants, Villas, Hotel, Office, Home

