

HYD-159S-12W 6.5K

Panel light

DESCRIPTION

This recessed panel light made of PA+PC material features excellent heat dissipation performance, effectively reducing light attenuation and significantly extending the lifespan of the lamp. Internally selected high-quality LED chips, combined with high-transparency diffusers, not only achieve high efficiency and energy savings but also reduce dark areas in the light, providing uniform and bright illumination. The soft light is not dazzling, creating a comfortable and healthy visual environment. The recessed concealed design seamlessly integrates with various decoration styles, without being conspicuous, and adds to the aesthetic appeal of the space.

ELECTRICAL FEATURES

Power	12 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES


Materials	PA,PC
Surface Material	Diffuser-White (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Recessed
Dimension	W140 x L140 x H31
Cut Dimension	115 x 115 mm

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 40 °C

PACKAGE SIZE


PCS/CTN	40
Carton Size	L54.5 x W36 x H34.5



PRODUCT SPECIFICATION

Luminaire luminous flux	1092 lm
Efficiency	91 lm/w
CCT	6500 k
CRI	≥80
Beam Angle	105°
Life span	20,000 h
Light source	HYUNDAI

IES FEATURES

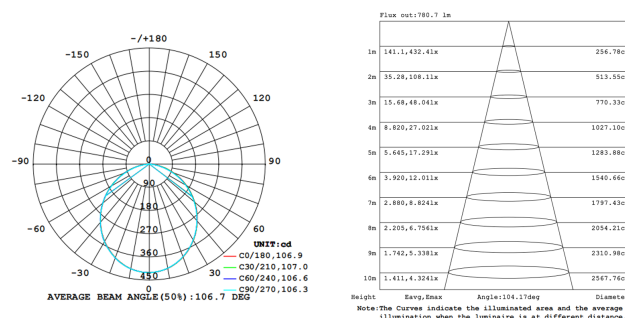

APPLICATIONS

Healthcare, Offices, Schools, Supermarkets, Restaurants, Hotel

