


HYD-GU10L-7W 4000K

GU10

DESCRIPTION

The GU10 product features precise beam angles and outstanding energy-saving performance. It is designed with a standard GU10 interface, allowing for plug-and-play functionality without the need to modify existing wiring, making installation and replacement extremely convenient. Additionally, it supports a wide operating temperature range from -20°C to $+40^{\circ}\text{C}$, ensuring stable and reliable operation.



ELECTRICAL FEATURES

Power	7 W
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	PA
Surface Material	Lens-semi transparent (PC)
Body Color	White
Adjustability	Not Adjustable
IP Class	IP20
Installation way	Base: GU10
Dimension	D50 x H56
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	$-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$


PACKAGE SIZE

PCS/CTN	-
Carton Size	-

PRODUCT SPECIFICATION

Luminaire luminous flux	812 lm
Efficiency	116 lm/w
CCT	4000 k
CRI	≥ 80
Beam Angle	25°
Life span	20,000 h
Light source	LM80 Module - SMD

IES FEATURES

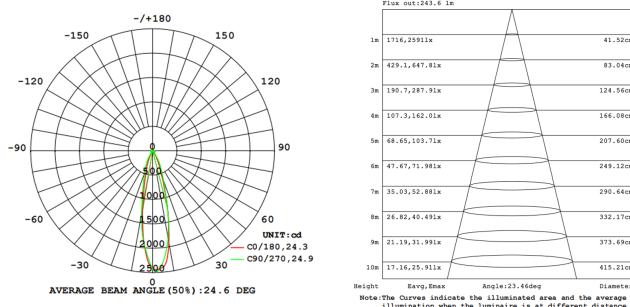

APPLICATIONS

Healthcare, Offices, Showrooms, Shopping malls, Villas, Museums, Hotel

