

HYD-719-120/160/200W 3CCT

High Bay

DESCRIPTION

This LED high bay light features a professional optical lens for precise beam angles and uniform illumination, reducing cargo blind spots and forklift hazards to ensure workplace safety. Equipped with branded LED chips, it delivers an efficacy of 100-160lm/W, combining high brightness with energy efficiency. The high-thermal-conductivity aluminum housing enables rapid heat dissipation, minimizing light decay and stabilizing chip temperature for a lifespan of over 50,000 hours with no significant brightness degradation within 3-5 years. Backed by a 5-year warranty, it guarantees low maintenance costs after installation.



ELECTRICAL FEATURES

Power	200 W
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Lens-transparent (PC)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP65
Installation way	Suspending
Dimension	D320 x H147
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-20 °C ~ + 45 °C


PACKAGE SIZE

PCS/CTN	-
Carton Size	-

PRODUCT SPECIFICATION

Luminaire luminous flux	29600 lm
Efficiency	148 lm/w
CCT	Switchable (3000, 4000, 6500)
CRI	≥80
Beam Angle	80°
Life span	50,000 h
Light source	LM80 Module - SMD

IES FEATURES

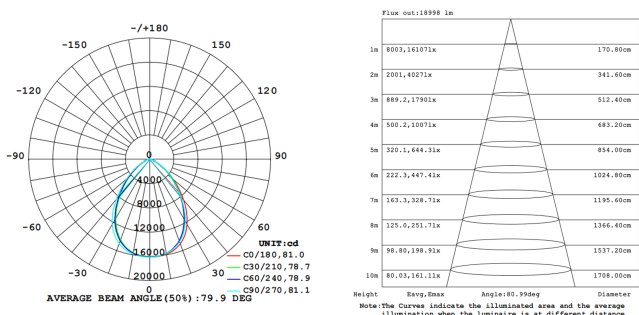

APPLICATIONS

factory, Warehouses, outdoor, Parking lots, Tunnel, loading areas, Industrial areas

