


HYD-T21-40W 6000K Single head

Tri-Proof

DESCRIPTION

This three-proof lamp features an advanced triple protection design, effectively providing waterproof, dust proof, and corrosion-resistant capabilities. It also exhibits excellent shock absorption and impact resistance. The lamp incorporates high-efficiency LED chips, delivering outstanding luminous efficacy exceeding 100 lm/W, which contributes to its superior energy efficiency and performance. The high-protection-level structure has been rigorously tested and optimized to ensure reliable protection of internal components. Furthermore, the integration of an efficient LED light source significantly enhances the overall functionality and reliability of the luminaire.

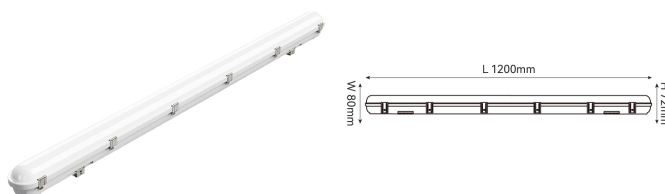

ELECTRICAL FEATURES

Power	40 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Power Factor (Fraction)	0.9
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	PC
Surface Material	Diffuser cover-White (PC)
Body Color	grey
Adjustability	Not Adjustable
IP Class	IP65
Mech.impact protection code	IK04
Installation way	Surface
Dimension	W80 x L1200 x H72
Cut Dimension	N/A

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-10 °C ~ + 45 °C


PACKAGE SIZE

PCS/CTN	-
Carton Size	-

PRODUCT SPECIFICATION

Luminaire luminous flux	5240 lm
Efficiency	131 lm/w
CCT	6000 k
CRI	≥80
Beam Angle	120°
Life span	50,000 h
Light source	LM80 Module - SMD

IES FEATURES

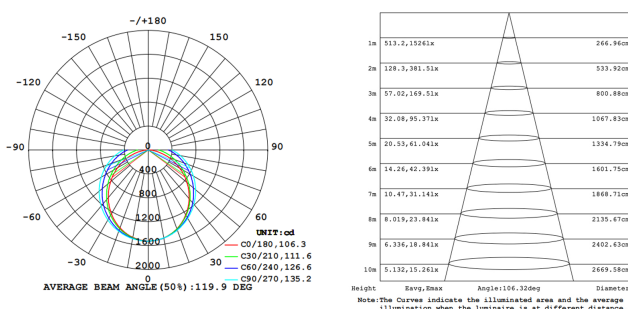

APPLICATIONS

factory, Warehouses, Parking lots, loading areas, Gymnasium, Outdoor porch

