


HYD-263-20W Ra80 4K

Downlight

DESCRIPTION

The HYD-263 recessed downlight is manufactured using an integrated die-cast aluminum construction, offering a robust and durable structure with excellent corrosion resistance. Aluminum possesses high thermal conductivity; when combined with the lamp body's optimized heat dissipation design, it enables efficient thermal management, thereby reducing LED lumen depreciation and extending the service life of the light source. The fixture is equipped with a highly transparent lens that exhibits high-temperature resistance and anti-aging characteristics, ensuring consistent and uniform light distribution.



ELECTRICAL FEATURES

Power	20 W
Input Voltage	AC220 - 240V
Line Frequency	50/60 Hz
Powered By	HYUNDAI
Dimmable	No
Control interface	No

TECHNICAL FEATURES

Materials	Die-cast aluminum
Surface Material	Reflector -White (Aluminum)
Body Color	Grey Housing
Adjustability	Not Adjustable
IP Class	IP44
Installation way	Recessed
Dimension	D123 x H68
Cut Dimension	115 mm

APPROVAL AND APPLICATION

Standard	CB,CE,ROHS
Working temperature	-10 °C ~ + 45 °C


PACKAGE SIZE

PCS/CTN	-
Carton Size	-

PRODUCT SPECIFICATION

Luminaire luminous flux	1840 lm
Efficiency	92 lm/w
CCT	4000 k
CRI	≥80
Beam Angle	36°
Life span	50,000 h
Light source	LM80 Tube -

IES FEATURES

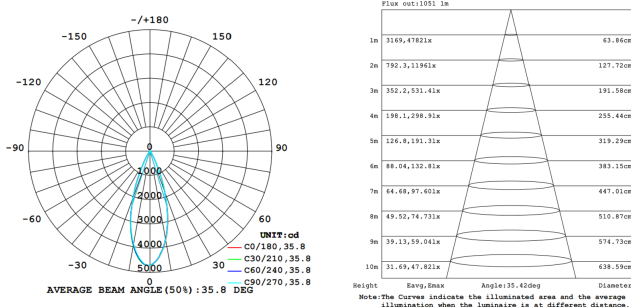

APPLICATIONS

Healthcare, Offices, Schools, Supermarkets, Villas, Hotel, Dining room

