
HYD-T9-40W 3000K

Linear Light

DESCRIPTION

Featuring an ultra–narrow minimalist design, the deep black aluminum profile seamlessly integrates with a high–transmittance PC diffuser, delivering clean lines and a modern industrial aesthetic that exudes understated elegance. This luminaire is perfectly suited for modern offices, boutique hotels, and minimalist residential spaces. Leveraging superior optical light distribution technology, the fixture not only achieves high luminous output but also projects light precisely and softly onto the desktop, fulfilling professional task lighting requirements while subtly creating spatial depth—an ideal fusion of functional lighting and ambient aesthetics.

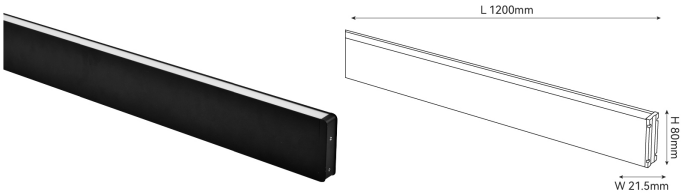

ELECTRICAL FEATURES

Power	40 W
Input Voltage	AC110 - 240V
Line Frequency	50/60 Hz
Power Factor (Fraction)	0.9
Powered By	HYUNDAI
Dimmable	No
Control interface	No


PRODUCT SPECIFICATION


Luminiaire luminous flux	1720 lm
Efficiency	43 lm/w
CCT	3000 k
CRI	⩾80
Beam Angle	110°
Life span	50,000 h
Light source	LM80 Module - SMD

TECHNICAL FEATURES

Materials	Aluminum
Surface Material	Diffuser cover-White (PC)
Body Color	BLACK
Adjustability	Not Adjustable
IP Class	IP20
Mech.impact protection code	IK02
Installation way	Pendant
Dimension	W21.5 x L1200 x H80
Cut Dimension	N/A

IES FEATURES





APPROVAL AND APPLICATION

Standard	CB,CE
Working temperature	-10 °C ~ + 45 °C

PACKAGE SIZE

PCS/CTN	1
Carton Size	-

APPLICATIONS

Offices, Galleries , Villas, Hotel, Dining room, Home

