


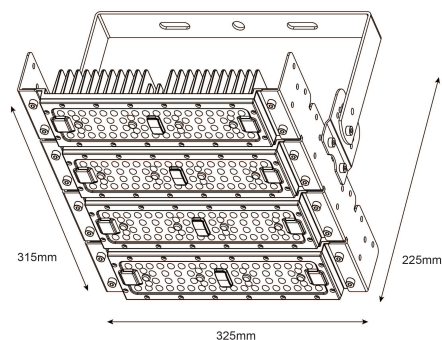

HYD-508-200W 5K

Floodlight

Description

The HYD-508 floodlight features a structure made of precision aluminum, offering outstanding resistance to vibration, impact and corrosion. It has a professional IP65 protection rating, enabling it to handle severe conditions such as heavy rain, sandstorms and extreme cold with ease. It is highly suitable for both indoor and outdoor use, providing long-term and stable lighting assurance. It adopts high-quality LED light sources, which maintain stable performance over a long period, significantly expanding the illumination range and improving energy efficiency. It is applicable to various scenarios and creates clear, safe and efficient spatial value with high-quality light.

Product Specification

Power	200 W
Luminaire luminous flux	24000 lm
Efficiency	120 lm/w
CCT	5000 k
CRI	≥80
Beam Angle	70°
Working temperature	-10 to +45 °C
Life span	50,000 h
IP	65
Dimension	W325 x L315 x H225

Technical Features

Materials	Housing-BLACK-Aluminum
Surface Material	Lens-transparent-PC
Installation way	Surface
Adjustability	Tilted

Applications

factory, Warehouses, outdoor, Gymnasium, factory, Warehouses, outdoor, Tunnel, Football stadiums, Building lighting, Gymnasium

Electrical Features

Light source	2835 SMD LM80 Module - SMD
Powered By	Driver-Eaglerise

IES Features

