


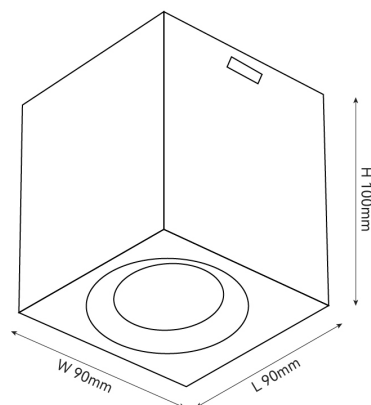

HYD-20002-7W 3CCT BK

Downlight

Description

The HYD-20002 surface-mounted downlight features a lightweight PA lamp body and a PC lens, delivering a uniform and soft light output. Available in pure white and black, it can blend seamlessly into modern, minimalist and industrial spaces. It can be installed directly without a ceiling, making it an ideal choice for lighting in hotels, homes and supermarkets.

Product Specification

Power	7 W
Luminaire luminous flux	525 lm
Efficiency	75 lm/w
CCT	Switchable (3000, 4200, 6500)
CRI	≥80
Beam Angle	55°
Working temperature	-20 to + 40 °C
Life span	20,000 h
IP	20
Dimension	W90 x L90 x H100

Technical Features

Materials	Housing-Black-PA
Surface Material	Lens-Transparent-PC
Installation way	Surface
Adjustability	Not Adjustable

Applications

Healthcare, Offices, Schools, Supermarkets, Villas, Hotel, Dining room, Home

Electrical Features

Light source	HYUNDAI
Powered By	HYUNDAI

Scene Application



IES Features

