


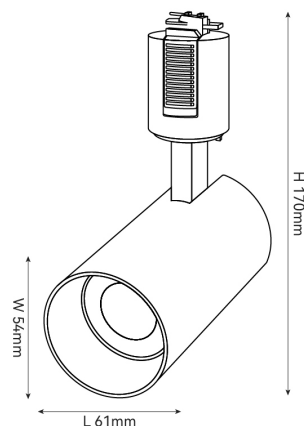

HYD-614-7W 5CCT WH

Track Light

Description

The angle and direction of the light head of the track light can be flexibly adjusted to achieve precise lighting and meet the needs of various scenarios. This product is compatible with standard tracks and has a plug-and-play feature, eliminating the need for wiring or tools. The installation process is time-saving and labor-saving, and even without professional experience, it can be easily completed. The track light adopts high-quality heat dissipation materials, which can effectively reduce the working temperature and thus extend the service life. The efficient LED light source has the advantage of energy saving and power saving, which can significantly reduce the cost of use.

Product Specification

Power	10 W
Luminaire luminous flux	1060 lm
Efficiency	106 lm/w
CCT	Switchable (2700, 3000, 4000, 5000, 6500)
CRI	≥80
Beam Angle	35°
Working temperature	-20 to + 40 °C
Life span	20,000 h
IP	20
Dimension	D54 x H170

Technical Features

Materials	Housing-White-Aluminum
Surface Material	Lens-transparent-PC
Installation way	On rail
Adjustability	Tilted & Rotated

Applications

Healthcare, Offices, Schools, Supermarkets, Commercial applications, Hotel

Electrical Features

Light source	HYUNDAI
Powered By	HYUNDAI

Scene Application



IES Features

