


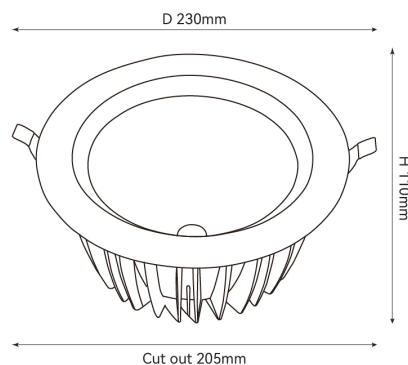

HYD-216R-40W 4K Ra80

Downlight

Description

The HYD-216R embedded down light features a concealed anti-glare optical design that delivers uniform, glare-free illumination with enhanced visual comfort. It supports an optional high color rendering index (CRI ≥ 90), ensuring accurate color representation, and incorporates flicker-free LED driver technology to minimize ocular fatigue. Multiple beam angle options enable versatile lighting deployment—ranging from general ambient illumination across residential spaces to precise task or accent lighting in designated zones. Constructed with a die-cast aluminum housing, the fixture ensures efficient thermal management, thereby maintaining lumen output stability over time; coupled with high-efficiency LED, it delivers superior energy efficiency and extended service life.

Product Specification

Power	40 W
Luminaire luminous flux	4840 lm
Efficiency	121 lm/w
CCT	4000 k
CRI	≥ 80
Beam Angle	75°
Working temperature	-10 to + 45 °C
Life span	50,000 h
IP	20
Dimension	D230 x H110
Cut Out	205 mm

Technical Features

Materials	Housing-BLACK-Aluminum
Surface Material	Lampshade-Transparent color-Glass
Installation way	Recessed
Adjustability	Not Adjustable


Applications

Offices, factory, Schools, Supermarkets, Showrooms

Electrical Features

Light source	LM80 COB Module - COB
Powered By	HYUNDAI

Scene Application

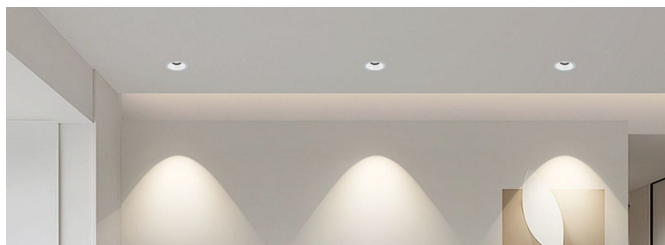

IES Features

